


### Technical Data 2500N/K

temperature range	2 to 10 °C	current consumption FLA	7.0 A
max. operating temperature	40 °C	defrosting	600 W
max. volume trailer	25 m <sup>3</sup>	air flow evaporator	1100 m <sup>3</sup> /h
power supply	230 V	air flow condenser	1100 m <sup>3</sup> /h
frequency	50 Hz	protection class, mounting side	54 IP
cooling capacity	2500 W	refrigerant	R452A
heating capacity	1600 W	refrigerant quantity	800 g
power consumption	1200 W	weight	63 kg
current consumption LRA	32 A	colour	9010 RAL

The data indicated refers to a set temperature of 2 °C • Refrigeration is based on the following operating conditions:  
outside temperature 30 °C, RH 50% • Insulation with a k-value of 0.2 W/m<sup>2</sup>K is recommended.

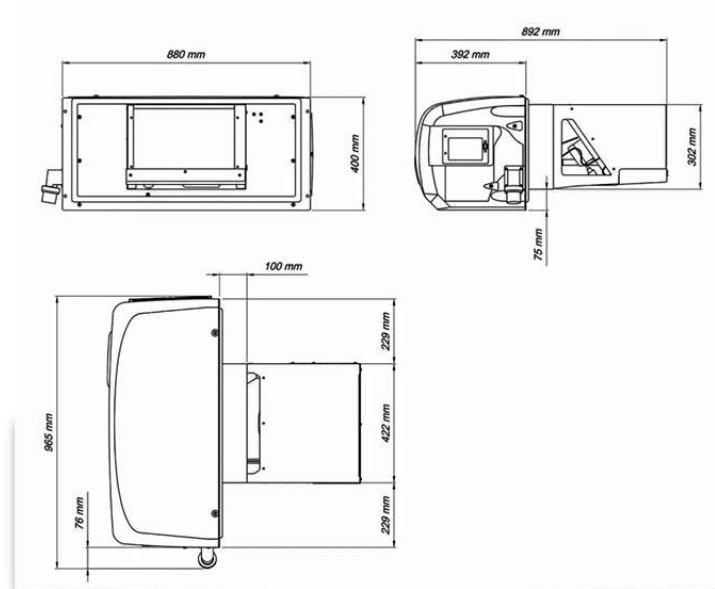

#### GOVI GmbH

Max-Planck-Str.5 - 53842 Troisdorf (Germany) - Phone : +49(0)2241-92 29 460 - E-mail: info@govi-gmbh.de

[www.govi-gmbh.de](http://www.govi-gmbh.de)