


## Technical overview POLARIK 25TN2



### Refrigeration capacity

Ambient Temperature	Cold room Temperature	Vol. Refrigeration capacity	<b>25TN2</b>
<b>+25°C</b>	-5	m³	29
		W	2673
	0	m³	41
		W	3349
	5	m³	64
		W	4133
<b>+32°C</b>	-5	m³	18
		W	2219
	0	m³	25
		W	2808
	5	m³	37
		W	3492
<b>+43°C</b>	-5	m³	12
		W	1934
	0	m³	15
		W	2463
	5	m³	25
		W	3076

Temperature range	-5 °C to 10 °C
Max. external temperature	43 °C
Max. volume of the cold room	25 m³
Voltage	230 V
Frequency	50 Hz
Cooling capacity	2808 W
Compressor energy consumption	1105 W
Current consumption LRA	LRA 42.2 A
Current consumption FLA	FLA 7.5 A
Defrost type	Hot gas
Evaporator air flow	1100 m³/h
Condenser air flow	1100 m³/h
Degree of protection	34 IP
Refrigerant	R-455A
Refrigerant quantity	850 g
Weight	114 kg
Color	9010/7024 RAL
Mounting type	Ceiling mounting

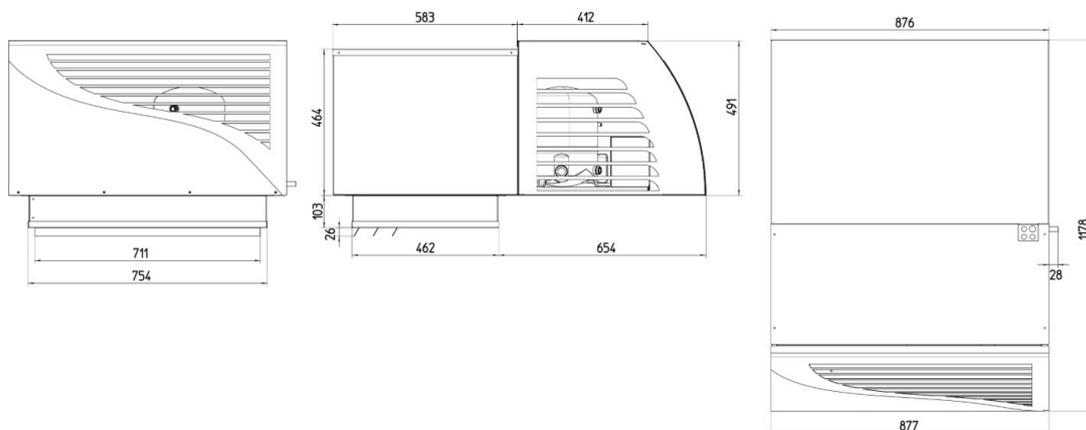

**GOVI GmbH**

Max-Planck-Str.5 - 53842 Troisdorf (Germany) - Phone: +49(0)2241-92 29 460 - E-mail: info@govi-gmbh.de

[www.govi-gmbh.de](http://www.govi-gmbh.de)